


## D2-M2

### Diesel + DEF (Diesel Exhaust Fluid) Duplex Pump

Compact reliable system for transferring diesel and DEF from storage tanks to generators. New generator systems will include emissions control based on reliable supply of DEF along with diesel fuel to run engines.

The D2-M2 is space saving but with redundant reliability for critical applications.

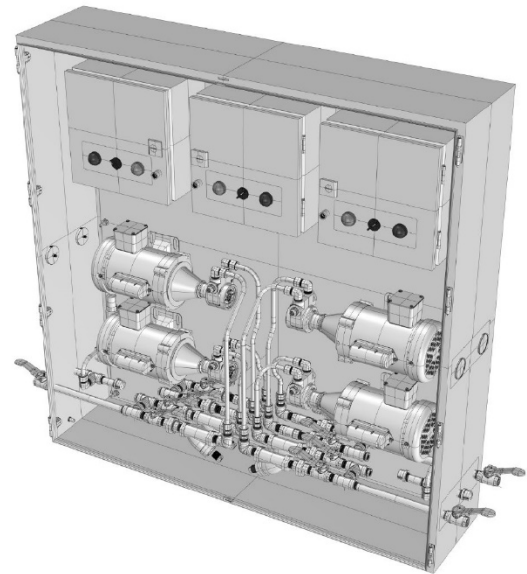

<b>Dimensions</b>	48" W x 48" H x 12" D (1200W x 1200H x 300D)
<b>Flow Capacity</b>	5-10 GPM (20-100 LPM) Diesel 1-3 GPM (4-12 LPM) DEF
<b>Pressure Capacity</b>	Standard 100 PSI (690 kPa)
<b>Pump Type</b>	Positive Displacement
<b>Inlet / Outlet (MNPT)</b>	0.75 IN (38) Diesel 0.50 IN (12) DEF
<b>Weight (Estimate)</b>	200 LB (90 KG)
<b>Standard Accessories</b>	Ball Valves Check Valves Strainers Gauges Leak Sensor
<b>Construction</b>	Welded Steel Construction Containment Basin (3 GAL) Stainless Construction for DEF Standard Open Frame or Weatherproof Enclosure

<b>Power</b>	120-230 VAC, 1P, 50-60 Hz
<b>Controller</b>	C8 + C2 Controller
<b>Output Relays (Dry Contact)</b>	4 Programmable
<b>Interface</b>	Color Touch Screen MAN-OFF-AUTO Switches Power ON Light Alarm Light
<b>Level Sensor Inputs (Optional)</b>	4-Point for Day Tank Refill
<b>Optional Accessories</b>	Floor Stand C9 Control Modbus / BACnet Level Transmitter for GAL
<b>How to Order</b>	D2-M2.05 Duplex Pump 5 GPM Diesel + 1 GPM DEF  D2-M2.10 Duplex Pump 10 GPM Diesel + 1 GPM DEF