


# UM6sb

**UM6sb:**  
**Cubic Stainless Steel Tank for DEF**  
**Generator Sub-Base Tank Design**  
**Double Wall and Insulated**

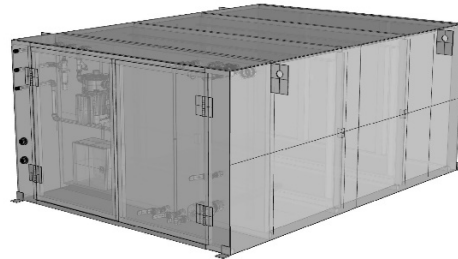

- Cubic Steel DEF Tanks with Containment
- Low Profile Flex Dimensions for Sub-Base Fit
- Accessories: Vent Caps, Direct Read Gauge, Inspect Port, Fill, Suction Pipe and Return Fittings
- C1 Tank Monitor Panel with High, Low, Leak Alarm, Output Relays, 4-20mA Analog Transmitter and Leak Sensor

<b>Tank Specification</b>	Stainless Steel Cubic DW Tank Generator Sub-Base Tank
<b>Controller</b>	C1 Control Panel
<b>Power</b>	120/230 VAC, 1P, 50-60 Hz
<b>Output Relays (Dry Contact)</b>	High and Low Level Leak Alarm Common Alarm
<b>Standard Accessories</b>	Vent Caps, Level Indicator, Gauge Port, Analog Level and Leak Sensor, Temp Sensors
<b>Construction</b>	Stainless Steel Construction Bead Blast Finish Interior Insulation 110% Tank Containment

<b>Model</b>	<b>GAL</b>	<b>WxLxH IN</b>		
UM6sb.250	250	60x36x84		
UM6sb.500	500	60x72x36		
UM6sb.750	750	60x108x36		
UM6sb.1000	1000	60x144x36		
<b>Other Equipment</b>				
		UM1 Simplex DEF Transfer Pumps UM2 Duplex DEF Transfer Pumps UM4 DEF Tank Fill System UM5 DEF Day Tanks Temperature Sensors and Control		