


WQ22

WQ22: Greywater Recycle System Aboveground

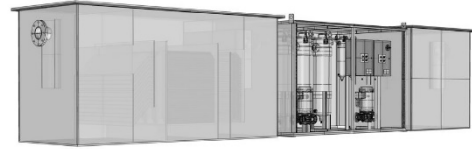

- Cubic Water Treatment Free-Standing Aboveground
- Aluminum, Stainless, HDPE Optional Construction
- Solids Chamber, Plate Clarifier, Coalescing Elements
- C8 Tank Monitor Panel with High Oil and Leak Alarm
- Advanced Treatment Options for Ultrafiltration and Purification

Tank Material	Aluminum (-A), HDPE (-H), Coated Carbon Steel (-C)
Controller	C8 Control Panel
Power	120-230 VAC, 1P, 50-60 Hz
Interface	Power ON Light Alarm Light Modbus to BMS
Output Relays (Dry Contact)	High Level Leak Alarm Common Alarm
Standard Accessories	Particulate / Trash Dam Outlet Wier Clarifier Plates Coalescing Plates
Optional Accessories	Tank Insulation and Heater Double Wall Construction Internal Epoxy Coating Manway 22 IN Ladder Internal - External

Model	GPM	LxWxH IN		In-Out IN
WQ11.100	5	60x18x36		1
WQ11.200	10	60x24x36		2
WQ11.300	25	84x24x36		3
WQ11.600	50	108x36x36		4
WQ11.900	75	120x36x48		6
WQ11.1K	100	132x48x48		6
WQ11.2K	200	144x60x60		8
WQ11.3K	300	216x60x60		10
WQ11.4K	400	216x72x72		10
WQ11.4k	500	240x72x72		10
Other Equipment				
Sludge Hopper Effluent Auto-Pump System Oil Skimmers and Pumps Integral Oil Storage Tank Discharge Pump and Control for: <ul style="list-style-type: none"> • Irrigation • Cooling Tower • Washwater Advanced Treatment Options: <ul style="list-style-type: none"> • Granular Media Filtration • UltraFiltration • UV / Ozone Purification 				